

1895, Boul. Frontenac Est
Theftord Mines (QC) G6G 6P6
CANADA
www.technometalpost.com

CONFIDENTIAL
THE INFORMATIONS CONTAINED
IN THIS DRAWING IS THE SOLE
PROPERTY OF TECHNO METAL POST INC.
ANY REPRODUCTION IN PART OR
AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF TECHNO METAL POST INC.
IS PROHIBITED

REVISIONS

DATE	DESCRIPTION	REV.

Client :

Client adress :


Project :

Drawing : **Techno Metal Post Model P6 (Deep fondation)**

Approved by :

Date : 2011-10-31 Scale : N/A

Drawing no: AI-P6-00 Page number : SHEET 1 OF 1

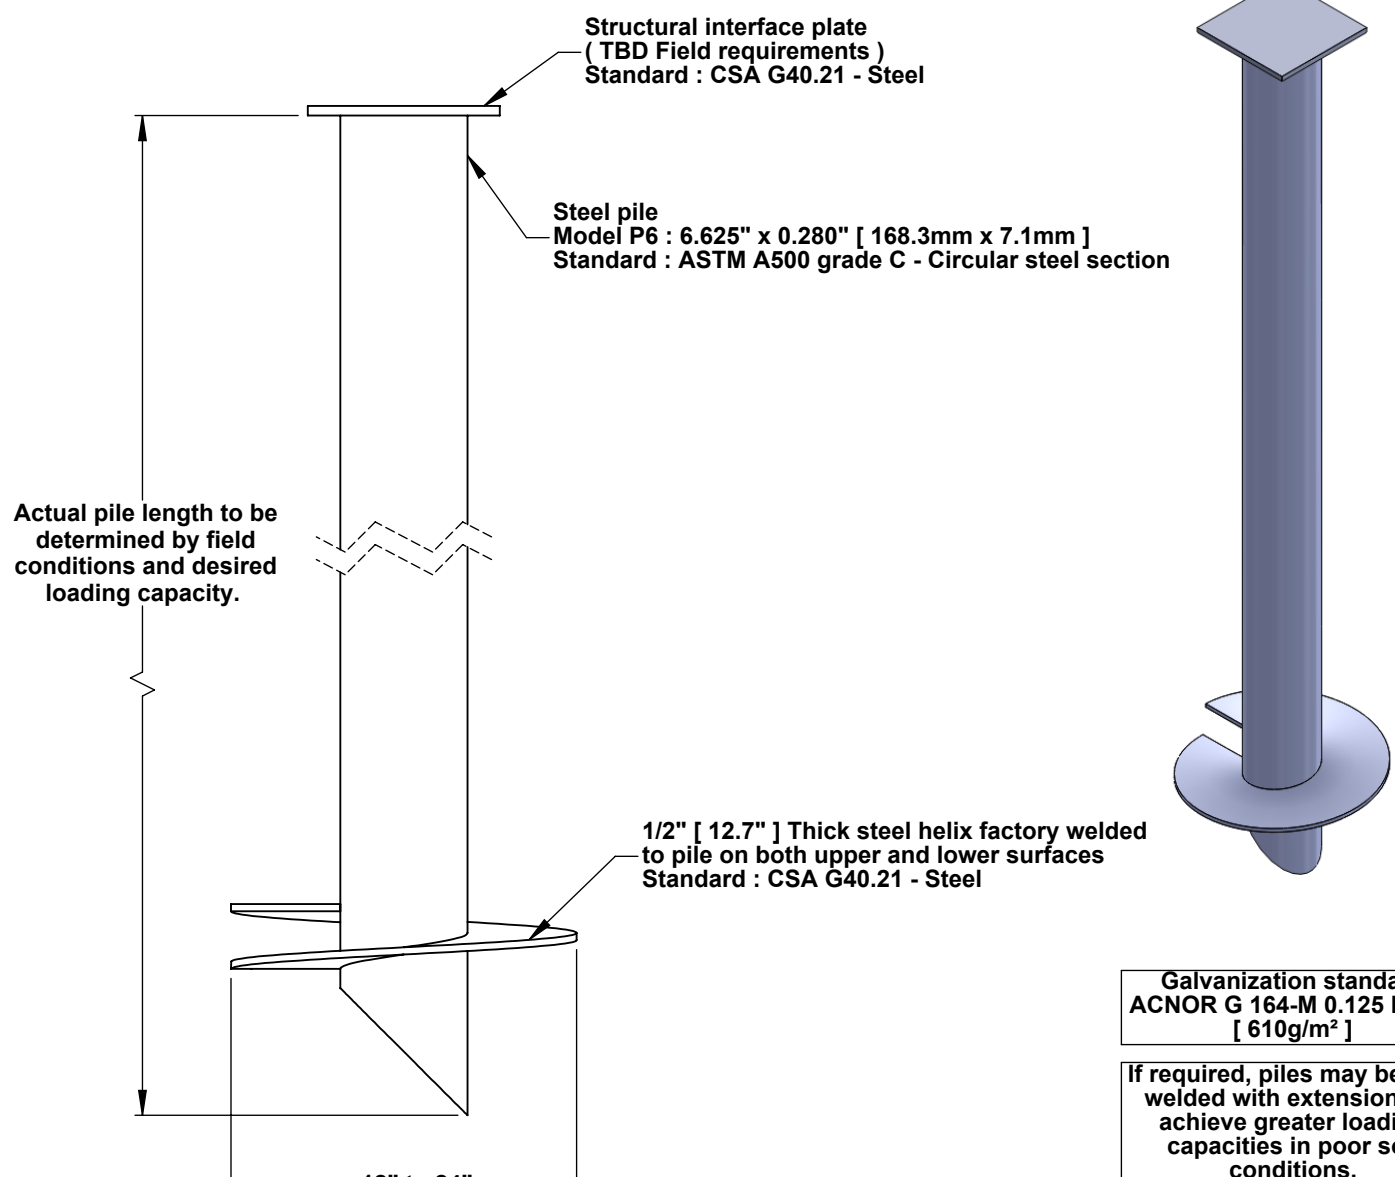

**Galvanization standard
ACNOR G 164-M 0.125 lbs/ft²
[610g/m²]**

**If required, piles may be field
welded with extensions to
achieve greater loading
capacities in poor soil
conditions.**

Allowable working load		
Compression and tension	Lateral *	Moment de flexion
50,000 lbs - 222.4 kN	6,745 lbs - 30 kN	38,796 lbs.pi - 52.6 kN.m
* The lateral capacity depends on the density of soil		